

**REMARKS**

Entry of the amendments to the specification, claims and abstract before examination of the application is respectfully requested. These claims have been amended to remove multiple dependencies.


If there are any questions regarding this Preliminary Amendment or the application in general, a telephone call to the undersigned would be appreciated since this should expedite the prosecution of the application for all concerned.

If necessary to effect a timely response, this paper should be considered as a petition for an Extension of Time sufficient to effect a timely response, and please charge any deficiency in fees or credit any overpayments to Deposit Account No. 05-1323 (Docket # 095309.57811US).

June 5, 2006

CROWELL & MORING LLP  
Intellectual Property Group  
P.O. Box 14300  
Washington, DC 20044-4300  
Telephone No.: (202) 624-2500  
Facsimile No.: (202) 628-8844  
GRE:lrd

Respectfully submitted,

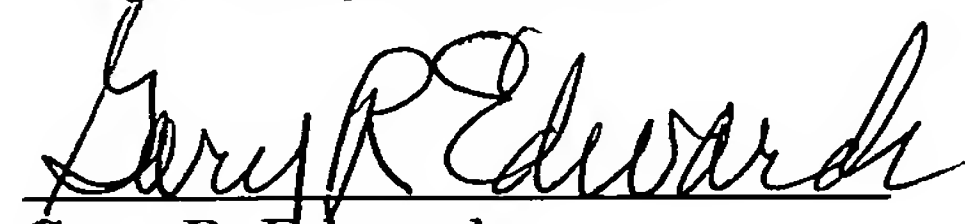

Gary R. Edwards  
Registration No. 31,824

**Amendments to the Abstract:**

Please substitute the new Abstract of the Disclosure submitted herewith on a separate page for the original Abstract presently in the application.

**Amendments to the Specification:**

Submitted concurrently herewith is a substitute specification and marked up version thereof.

~~DaimlerChrysler AG~~

~~Forming tool~~

5

FORMING TOOL

BACKGROUND AND SUMMARY OF THE INVENTION

This application is a National Phase of  
PCT/EP2004/012690, filed November 101, 2004, and claims  
10 the priority of German patent document DE 103 56 534.5,  
filed December 4, 2003, the disclosure of which is  
expressly incorporated by reference herein.

The invention relates to a forming die ~~in accordance with~~  
15 ~~the preamble of patent claim 1~~ of the type that has a  
recess which forms a shaping space into which a workpiece  
can be introduced.

A forming die of the generic type which is ~~known from~~  
20 ~~disclosed in German patent document DE 101 39 135 A1-~~  
~~In that document, the forming die,~~ has a vent line which  
is formed as a passage, runs within a die block of the  
forming die and connects the shaping space formed by the  
die cavity to the area surrounding the die. During [[the]]  
25 shaping of the workpiece, the air which is present in the  
shaping space is displaced [[out of]] from the forming die  
by [[the]] deformation of the workpiece. ~~If a workpiece, in~~  
~~this case in the form of a hollow profiled section, is~~  
~~then inserted into the shaping space of the forming die~~  
30 ~~and placed under pressure, the workpiece,~~ so that the  
latter molds itself [[to]] accurately to match the cavity  
of the shaping space. [[Since]] However, the vent line

opens out at the cavity, the opening where it opens out forms an extremely undesirable mark on the workpiece on account of the high contact pressure with which the workpiece is pressed onto the cavity to achieve the  
5 required contour accuracy. The opening of the line may even be so large that the workpiece is pressed into the line, where it is undesirably stamped out, which inevitably leads to the part being scrapped.

10 ~~[[The]]~~ One object of the invention is based on the  
~~object of further developing to provide~~ a forming die  
of the generic type, which is simple, and which, during  
the shaping of a workpiece, achieves in such a way that  
contours ~~[[which]]~~ that are unaffected by the  
15 arrangement of passages connecting the shaping space to  
the area surrounding the die ~~are achieved in a simple~~  
~~way during the shaping of the workpiece.~~

~~According to the invention, this object is achieved by~~  
20 ~~the features of patent claim 1.~~

~~As a result of~~  
This and other objects and advantages of the invention  
are achieved by the forming die according to the  
25 invention, in which a liquid-permeable and gas-  
permeable insert body ~~being~~ is arranged in the forming  
die, a peripheral region of which forms a portion of  
the cavity. Due to a ~~and on account of the~~ fluidic  
connection of the passage to this insert body, the  
30 opening where the passage opens out is covered, ~~with~~  
~~the result~~ so that no imprint of this opening is formed  
on the workpiece when it is being pressed onto the

cavity by the forming process, in particular in the calibration phase. Therefore, the contours of the workpiece remain unaffected during shaping.

5 Since the insert body is permeable to liquid and gas, the function of the passage, namely that of discharging (and if appropriate also supplying) liquid or a gas, for example air, is completely retained. An insert body of this type is simple to produce and can readily  
10 be installed in the die after the recess intended for it has been formed. When a certain state of wear has been reached, the insert body can be exchanged with little difficulty using suitable securing means.

15 Moreover, the invention also obviates the problem of predetermining the correct position for forming the passage, since the insert body means that the media which are to be discharged from the cavity are captured over a certain area rather than in punctiform fashion,  
20 and can pass through the insert body virtually unimpeded until they reach the opening of the passage, ~~which means that.~~ As a result, accurate positioning of the passage is no longer necessary; the passage can now open out at any desired position of the insert body.

25

In a particularly preferred refinement of the invention as ~~described in claim 2,~~ the insert body consists of a porous sintered metal. ~~This in particular,~~ which ensures that ~~the insert body~~ it is able to withstand the contact pressures  
30 resulting from the deformation without being damaged. The porosity is effected by simple pores and micropassages through which liquids and gases can penetrate.

In a further preferred configuration of the invention ~~according to claim 3~~, the insert body is an ultrafine sieve or a diaphragm. If an ultrafine sieve is used, it  
5 should be ensured that the mesh is designed to be as rigid and durable as possible, and the mesh size is kept as small as possible, so that on the one hand the contact pressures can be absorbed and on the other hand an imprint of the meshes on the workpiece is prevented. If a  
10 diaphragm is selected, the diaphragm should ~~likewise be designed to be rigid in order in this way~~ to cope with the contact pressures. Of course, the diaphragm must also be ~~designed in such a way as to be~~ permeable to liquids and gases. In addition to complete permeability in this  
15 respect, semipermeability of the diaphragm is also conceivable. Ultrafine sieves and diaphragms are inexpensive, very simple to produce and particularly simple to apply to the die. In this case, it is also possible for existing forming dies to be retrofitted with  
20 an insert body of this type with only a very small amount of effort.

In a further particularly preferred configuration of the forming die according to the invention ~~as described~~  
25 ~~in claim 4~~, the forming die is a hydroforming die, ~~in which case~~ and the workpiece is formed by a peripherally continuous hollow profiled section. If the forming die is used as a hydroforming die, the configuration of the forming die in accordance with the invention is highly  
30 advantageous, since it is known that in the hydroforming process extremely high pressures are exerted on the hollow profiled section, which likewise leads to immense contact pressures of the hollow

profiled section against the die cavity. ~~Since as~~ As a result the shape of the cavity is highly accurately reproduced on the hollow profiled section[[,]]; therefore, the way in which the invention prevents imprints of the openings of passages connected to the shaping space is highly important. As a result, the outer contour of the hollow profiled section, which is of tolerance-free and highly accurate configuration as a result of the hydroforming process, is retained without ~~it being~~ necessary need to dispense with the supply or removal of liquids or gases from the shaping space or into the shaping space.

~~The invention is explained in more detail below on the basis of an exemplary embodiment illustrated in the drawing, in which the figure, in the form of~~

Other objects, advantages and novel features of the present invention will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The single figure is a lateral longitudinal section, which shows a representative embodiment of a forming die according to the invention, with insert bodies arranged at the shaping space.

#### DETAILED DESCRIPTION OF THE DRAWING

The figure illustrates a hydroforming die formed as



forming die 1, which has a cavity 3 forming a shaping space, into which a workpiece (in this case a hollow profiled section) is introduced. (The forming die 1 may also be a deep-drawing die.) A plurality of passages 4, 5, 6 and 7, which connect the shaping space 2 to the area surrounding the die, have been machined into the forming die. The passages 4 to 7 are used to supply and/or discharge lubricant to the hollow profiled section which has been introduced into the forming die 1, in order to reduce the friction between the hollow profiled section and the cavity 3 during the forming process. The passages 4 to 7 can also be used to discharge air and pressure medium, which otherwise (on account of being enclosed in the shaping space 2) would ~~hugely~~ very substantially impede the forming process. Air and pressurized fluid in the shaping space 2 originate on the one hand from the volume of air which has not been expelled during closure of the forming die 1 and on the other hand, with regard to the pressurized fluid, from two pressurized fluid fractions, namely the pressurized fluid which flows out after removal of a fully shaped hollow profiled section from the forming die 1 and the pressurized fluid which undesirably enters the gap between hollow profiled section and cavity 3, passing into the shaping space 2, during filling of the hollow profiled section.

A plurality of ~~liquid-permeable~~ liquid and gas-permeable insert bodies 8 are integrated in the forming die 1 and are each accommodated in a recess 9 in the die 1 near to the shaping space. Although the insert bodies 8 in this case consist of a porous sintered metal, it is also possible for them to be formed by an ultrafine sieve or a

diaphragm. The peripheral or surface region 10 of the insert bodies 8 which faces the shaping space 2 itself in each case forms a portion of the cavity 3, ~~with the result~~ so that there are no discontinuities in the profile of the  
5 cavity 3. The passages 4 to 7 which run within the forming die 1 open out at a rear side 11 of the respective insert body 8 outside said peripheral region 10.

On account of the porosity of the insert body 8, the air  
10 or pressurized fluid can penetrate through the pores and/or micropassages of the insert body 8 into the passages 4 to 7, from which they are discharged from the forming die either through the force of gravity or by means of a suitable pump. Therefore, air and pressurized  
15 fluid can easily be displaced by the workpiece, which is moving ever closer to the cavity 3, out of the shaping space 2 into the passages 4 to 7 via the insert bodies 8, without an imprint of the opening of the passages 4 to 7 being formed after the workpiece comes into contact with  
20 the cavity 3.

Furthermore, it is also conceivable to use an insert body 8 which includes relatively large parts of the die cavity 3 and in this case comprises a plurality of regions of the  
25 cavity 3 which are prone to inclusions of media and therefore require discharge of air and pressurized fluid. It is sufficient in this case ~~sufficient~~ for only a single passage to be connected to this elongate insert body 8, since on account of the displacement pressure  
30 originating from the workpiece which is being shaped, the air and the pressurized fluid can also penetrate through lateral, oblique and/or labyrinth-like micropassages and pores in the insert body 8 in order to

enter the passage 4, 5, 6 or 7. As a result, there is no need for accurate positioning of the passage 4, 5, 6 or 7, which leads to considerable simplification of the design of the die 1, and the production of the passage  
5 can be automated during manufacture of the die 1. It is in this case possible to select a location which is the most appropriate both for the discharge of the media and for the design of the die.

10 Furthermore, it is ~~conceivable~~ also possible for the hydroforming die 1 to be configured for the widening of plates, in which case the workpiece is formed by two plates on top of one another, which are clamped in the forming die 1 between its upper and lower die blocks. A  
15 fluidic internal high pressure is generated between the plates by means of a lance-like plunger which is assigned to the forming die 1, has at least one axial pressurized fluid passage inside it and is inserted between the plates, with the result that these plates are expanded to  
20 form a hollow profiled section.

The foregoing disclosure has been set forth merely to illustrate the invention and is not intended to be limiting. Since modifications of the disclosed  
25 embodiments incorporating the spirit and substance of the invention may occur to persons skilled in the art, the invention should be construed to include everything within the scope of the appended claims and equivalents thereof.

30